

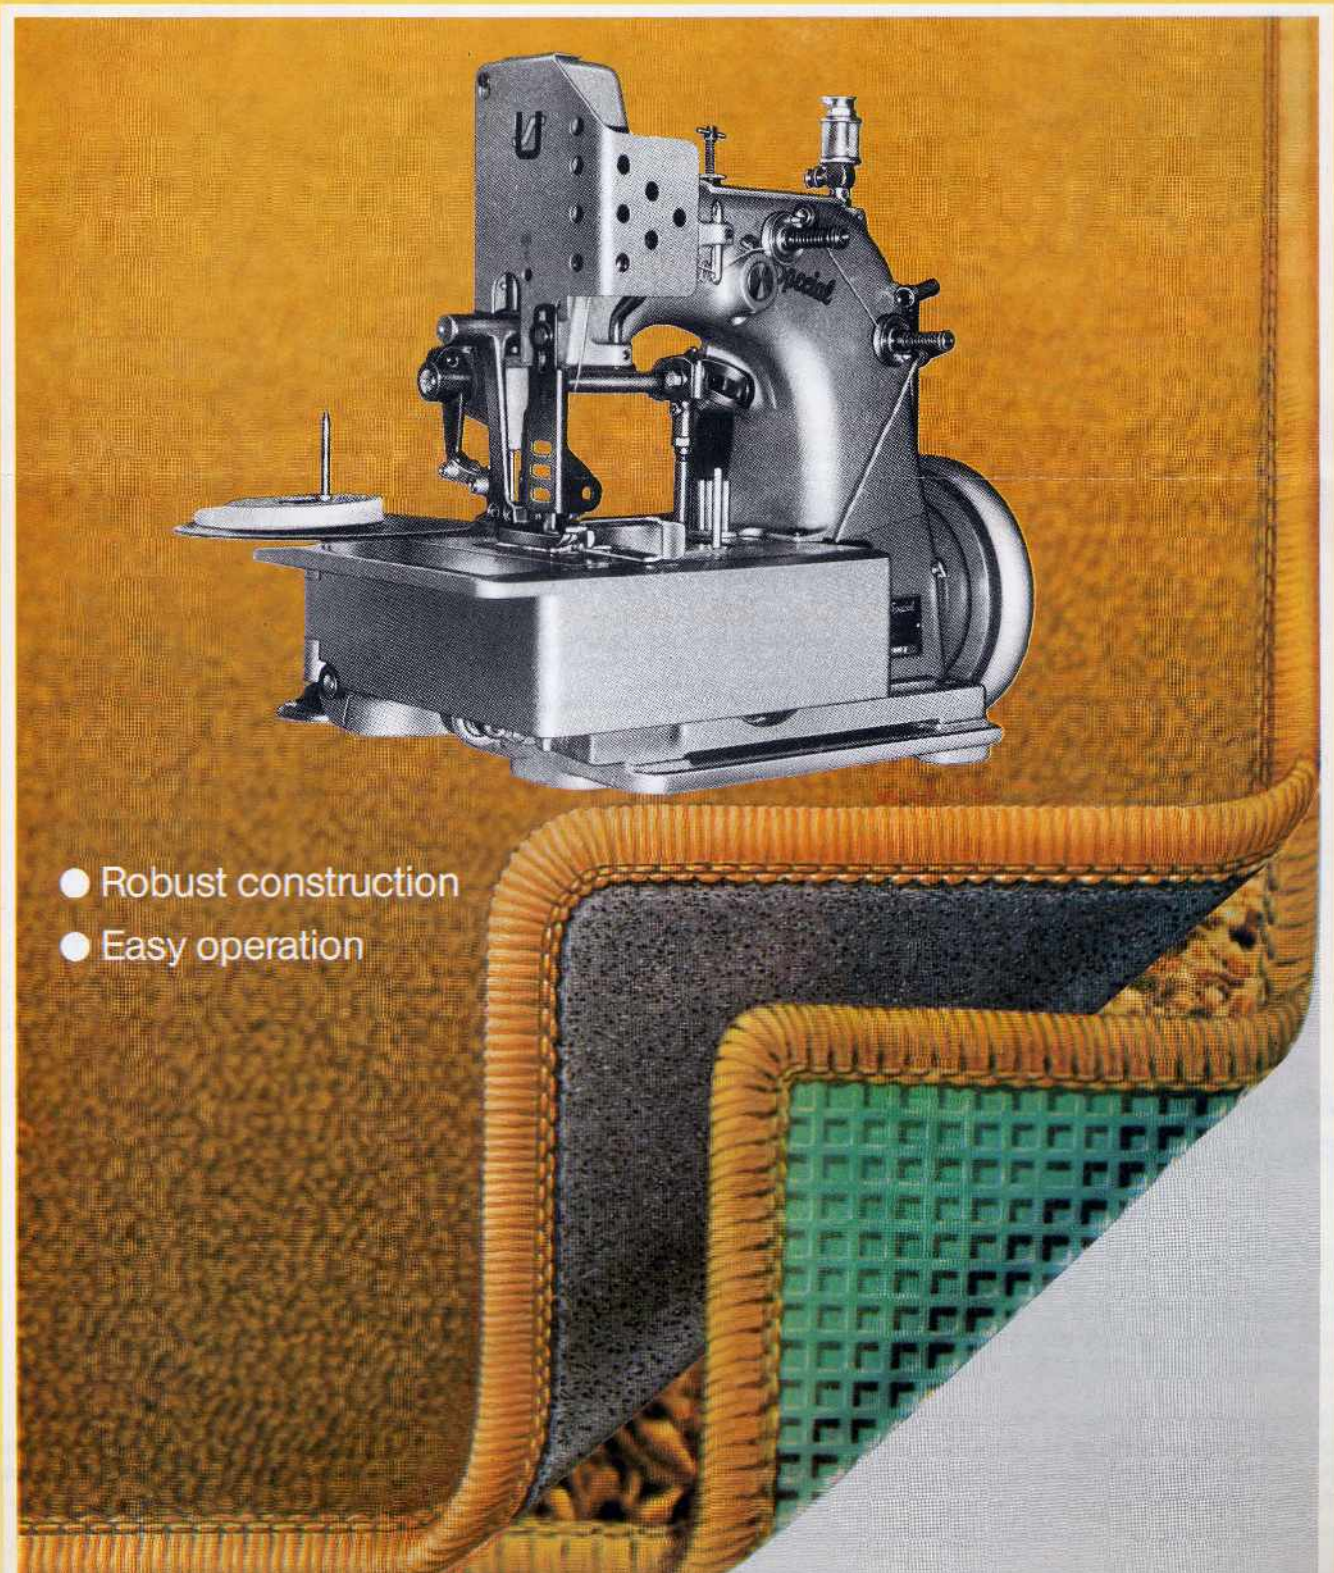
 **Union Special**[®]

81200 C
81200 AC
81200 AG
81200 AF

81200 CZ-2898
81200 AGZ-2948 A
81200 Z-2686








Class 81 200 – Herakles[®]

Seaming and Hemming Machines for carpets and rugs



- Robust construction
- Easy operation

Class 81 200 – Herakles®

Machine Style	Application	Seam Specification/ Seam Width
81200 C »HERAKLES« Single-needle, three thread carpet overedging machine. Plain feed.	For decorative overseaming on carpets and rugs without rubber coated or rubber foam backing.	 8-10 mm
81200 AC »HERAKLES« Single-needle, three thread carpet overedging machine with guide for binding tape. Plain feed with synchronized upper feed.	For decorative overseaming on carpets and rugs. The combined upper and lower feed is especially suitable for overedging carpets with rubber coated and rubber foam backing and similar coatings with strong adhesion. The fabric is fed uniformly, without undesired stitch shortenings which perforate the basic carpet tissue. The binding tape is put around the carpet edge by a tape guide and covered by the overedge seam. Width of binding tape 15 mm (19/32 in). Sewing capacity for carpet in tape guide: 12 mm (15/32 in). Depending on carpet material overseaming without binding tape is possible.	 8-10 mm
81200 AG »HERAKLES« Single-needle, two thread carpet overedging machine with guide for binding tape. Plain feed.	For decorative overseaming on carpets and rugs (without rubber coated or rubber foam backing). The binding tape is put around the carpet edge by a tape guide and covered by the overedge seam. Width of binding tape 15 mm (19/32 in). Sewing capacity for carpet in tape guide: 6,5 mm (1/4 in).	 8-10 mm
81200 AF »HERAKLES« Single-needle, two thread carpet overedging machine with guide for binding tape. Plain feed with synchronized upper feed.	For decorative overseaming on carpets and rugs. The combined upper and lower feed is especially suitable for overedging carpets with rubber coated and rubber foam backing and similar coatings with strong adhesion. The fabric is fed uniformly, without undesired stitch shortenings which perforate the basic carpet tissue. The binding tape is put around the carpet edge by a tape guide and covered by the overedge seam. Width of binding tape 15 mm (19/32 in). Sewing capacity for carpet in tape guide: 12 mm (15/32 in).	 8-10 mm
81200 CZ-2898 »HERAKLES« Single-needle, three thread carpet overedging machine. Plain feed.	For decorative overseaming carpets and rugs without rubber or foam backing with or without binding tape. Binding tape is put around the carpet edge by a tape guide and covered by the overedge seam. Width of binding tape 13 mm (33/64 in). Sewing capacity of tape guide for carpets up to 7 mm (15/32 in). On request also available with extra tape guide 81203 I-24 for tapes 24 mm wide, for sewing high pile carpets, capacity of guide up to 11 mm (7/16 in).	 12-13 mm
81200 AGZ-2948 A »HERAKLES« Single-needle, three thread carpet overedging machine. Plain feed.	For overseaming the small right and left edges of the body material without pile on ready made carpets, the especially designed presser foot bends the pile to the left, so that the needle penetrates only the body of the carpet close to the pile, which covers the needle thread.	 6-7 mm
81200 Z-2686 »HERAKLES« Single-needle, two thread carpet overedging machine. Plain feed with synchronized upper feed.	For blind stitch hemming ready made carpets.	 10 mm

Union Special Power Table, height adjustable

For driving of these machines, we supply our modern and very robust *Union Special* sewing stand completely installed with clutch motor and plastic laminated table top. When ordering, please state kind of current, voltage, and frequency in your plant.



FRANCE MACHINES A COUDRE

81 Quai PERRACHE - 69002 LYON

Tel : 04 72 56 05 50 Fax : 04 72 40 03 04

www.francemachinesacoudre.fr / francemachinesacoudre@wanadoo.fr